

Peerless Industrial Group

1416 East Sanborn St.,
Winona MN 55987

Phone: (800) 873-1916 • **Fax:** (800) 356-1149


Email: custserv@peerlesschain.com

Website: www.peerlesschain.com



PEERLESS[®]
A KITO GROUP COMPANY

Item # LLB-2-20, LLB - Load Leveling Beam

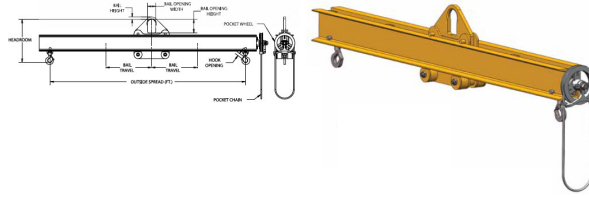

FEATURES

- This style of lifting beam can lift off center loads easily by adjusting the bail with the standard chain wheel prior to the lift, and has unlimited adjustment within the span of the bail.
- This lifter can be used where headroom is limited, and comes standard with one outside spread and two swivel hooks (additional spreads and swivel hooks are available).
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- 100% of ALL Peerless Lifting Beams are Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.

OPTIONS

- Motorized bail
- Additional lift points
- Higher capacities
- Additional lengths
- Low headroom bail
- Additional hooks
- Faspins
- Beam stand

Capacity (Tons)	2
Outside Spread (Ft.)	20
Headroom	20
Bail Height	1.5
Bail Opening Width	3
Bail Opening Height	5
Bail Thickness	0.625
Hook Opening	1
Bail Travel (Half of Center)	40
Weight (Lbs.)	938