

**Peerless Industrial Group**

1416 East Sanborn St.,  
Winona MN 55987

**Phone:** (800) 873-1916 • **Fax:** (800) 356-1149


**Email:** [custserv@peerlesschain.com](mailto:custserv@peerlesschain.com)

**Website:** [www.peerlesschain.com](http://www.peerlesschain.com)



**PEERLESS**<sup>®</sup>  
A KITO GROUP COMPANY

**Item # SDSB-5-10, SDSB - Standard Duty Spreader Beam**

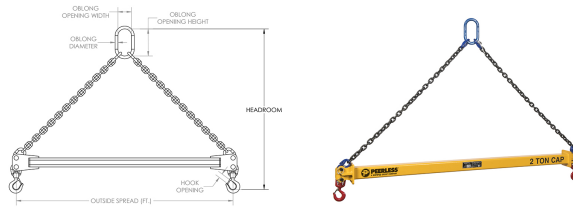

The SDSB Standard Duty Spreader Beam is ideal for outdoor construction applications and utilizes upper rigging spread between the two lift points that adds extra stability to the lift. It is supplied with a pair of heavy-duty swivel hooks.

The SDSB is engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2 and Proof-Tested to 125% capacity.

**FEATURES**

- This style of lifter is utilized with upper rigging spread between two lift points that adds extra stability to the lift.
- This spreader beam should be utilized where headroom is not limited and comes standard with a pair of swivel hooks.
- Can be supplied with optional chain or wire rope top rigging.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- 100% of ALL Peerless Spreader Beams are Proof-Tested to 125% capacity and certificates supplied at No Additional Charge.

**OPTIONS**

- Higher capacities
- Additional lengths
- Chain top rigging
- Wire rope top rigging

Capacity (Tons)	5
Outside Spread (Ft.)	10
Headroom	77
Oblong ML Diameter	1
Oblong ML Opening Width	3.5
Oblong ML Opening Height	7
Hook Opening	1.36
Weight (Lbs.)	117