



PEERLESS
A KITO GROUP COMPANY

CERTIFIED!

...to Canadian Coast Guard
TP2534E Code of Safe Practice for
Ships Carrying Timber Deck Cargoes

1/2" DECK LASHING CHAIN


Heat treated galvanized chain. A long link design allows for many various attachments and fittings to be used, making for a more versatile chain. Deck lashing chain is especially suited for log lashing and securing cargo on container ships. 4:1 Safety Factor.



Deck Lashing Chain

STOCK #	Trade Size (Inches)	Wire Diameter (Inches)	Inside Link Dimensions (Inches)		Quantity Per Pkg (Ft.)	Net Weight (Lbs.)	Working Load Limit	
			Length	Width			(Lbs.)	(Kgs.)
8612312	1/2	0.531	3.150	0.930	1,000	2,182	9,000	4,080
560141301	1/2	0.531	3.150	0.930	460	1,004	9,000	4,080

Marked PCL every 6 links

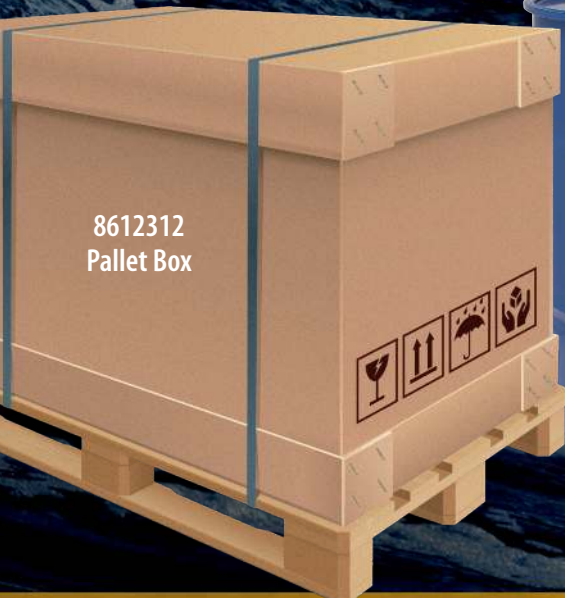

8612312
Pallet Box



560141301
55 Gallon Drum

USA hallmark is stamped on every link of chain

Deck lashing chain is NOT approved for overhead lifting. DO NOT exceed the working load limit.

Peerless Industrial Group

1416 East Sanborn Street • P.O. Box 5349 • Winona, MN • 55987-5349
www.peerlesschain.com • PHONE: (800) 873-1916 • FAX: (800) 356-1149
#27.21 Printed in the U.S.A. 2020 © Peerless Industrial Group All rights reserved