

PEER-LIFT™

THE QUALITY ALTERNATIVE IN GRADE 80 ALLOY FITTINGS

**FORGED ALLOY STEEL
QUENCHED AND TEMPERED**

ASTM A952 COMPLIANT



**PROOF TESTED
W/CERTIFICATION
FATIGUE TESTED**

PEER-LIFT™ GRADE 80 FORGINGS


PROOF TESTED AT TWICE THE WORKING LOAD LIMIT.

FATIGUE TESTED AT 1.5 TIMES THE WORKING LOAD LIMIT FOR 20,000 CYCLES.

MEET OR EXCEED ASTM A952 AND OSHA 1910 STANDARDS.


MECHANICAL COUPLING LINK (GRADE 80)

PART NUMBER	CHAIN SIZE	WORKING LOAD LIMIT	DIMENSIONS IN INCHES					WEIGHT EACH
			A	B	C	D	E	
8553180	9/32"	3,500 lbs.	1 1/32"	2 7/64"	27/32"	53/64"	53/64"	0.31 lbs.
8553280	3/8"	7,100 lbs.	15/32"	2 5/8"	1 3/64"	1 1/64"	63/64"	0.75 lbs.
8553380	1/2"	12,000 lbs.	5/8"	3 7/16"	1 25/64"	1 19/64"	1 7/32"	1.72 lbs.
8553480	5/8"	18,100 lbs.	51/64"	4"	1 21/32"	1 5/8"	1 17/32"	3.04 lbs.

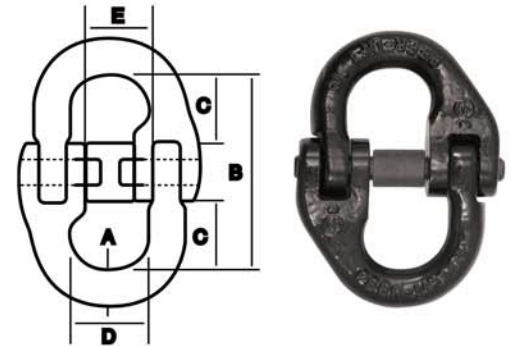


CLEVIS CRADLE GRAB HOOK (GRADE 80)

PART NUMBER	CHAIN SIZE	WORKING LOAD LIMIT	DIMENSIONS IN INCHES				WEIGHT EACH
			A	B	P	R	
8528280	9/32"	3,500 lbs.	25/64"	25/64"	23/64"	1 5/64"	0.84 lbs.
8528480	3/8"	7,100 lbs.	33/64"	33/64"	31/64"	2 23/32"	1.74 lbs.
8528680	1/2"	12,000 lbs.	5/8"	5/8"	5/8"	3 15/64"	3.24 lbs.
8528780	5/8"	18,100 lbs.	23/32"	23/32"	45/64"	3 15/16"	6.39 lbs.

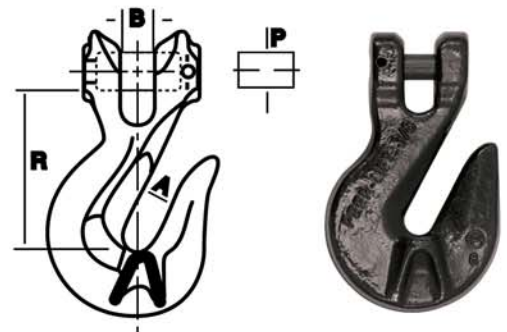

CLEVIS SLING HOOK WITH CAST LATCH (GRADE 80)

PART NUMBER	CHAIN SIZE	WORKING LOAD LIMIT	DIMENSIONS IN INCHES				WEIGHT EACH
			A	B	P	R	
8518280	9/32"	3,500 lbs.	1 3/16"	3/8"	23/64"	3 29/32"	1.1 lbs.
8518480	3/8"	7,100 lbs.	1 33/64"	1/2"	33/64"	4 23/32"	2.21 lbs.
8518680	1/2"	12,000 lbs.	1 13/16"	39/64"	5/8"	6 7/64"	4.85 lbs.
8518780	5/8"	18,100 lbs.	2 15/32"	47/64"	45/64"	7 3/16"	7.94 lbs.

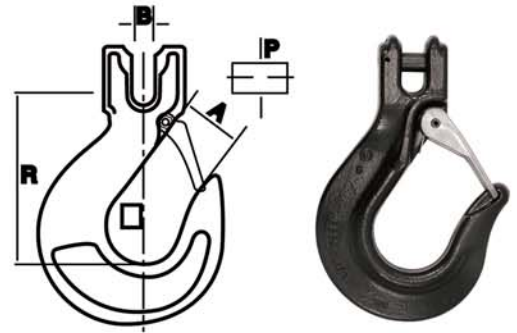

REPLACEMENT CAST LATCH KITS 9/32"- 8518230, 3/8"- 8518430, 1/2"- 8518630, 5/8"- 8518730

PEER-ALLOY CHAIN (GRADE 80)

PART NUMBER	CHAIN SIZE	WORKING LOAD LIMIT	MATERIAL DIAMETER	INSIDE LENGTH	INSIDE WIDTH	FEET PER DRUM	WEIGHT PER 100 FT.
5050223	9/32"	3,500 lbs.	9/32"	0.87	0.405	800	77 lbs.
5050423	3/8"	7,100 lbs.	13/32"	1.226	0.56	500	152 lbs.
5050623	1/2"	12,000 lbs.	17/32"	1.57	0.75	300	266 lbs.
5050823	5/8"	18,100 lbs.	5/8"	1.93	0.865	200	360 lbs.



Caution: Do not exceed working load limits.

©2006 Peerless Chain Company, 27.30 6/06